

uniquely different



NuVista® TILES

by dinoflex



Recycled
Rubber Flooring

patios

rooftops

walkways

landscapes



Dinoflex Exterior Surfacing

Performance proven in the harshest freeze/thaw climatic conditions, Dinoflex recycled rubber tiles and pavers provide a durable, resilient, impact and sound absorbing surface ideal for new construction as well as renovation projects. Environmentally friendly and sustainable; our Exterior recycled rubber products are the right choice for high performance green landscaping and for rejuvenating old surfaces.


Commercial and Residential Applications:

- Green roofs
- Entryways
- Rooftops
- Porches
- Landscapes
- Stair treads
- Walkways
- Patios
- Gardens
- Decks



Colors:


Pigment*

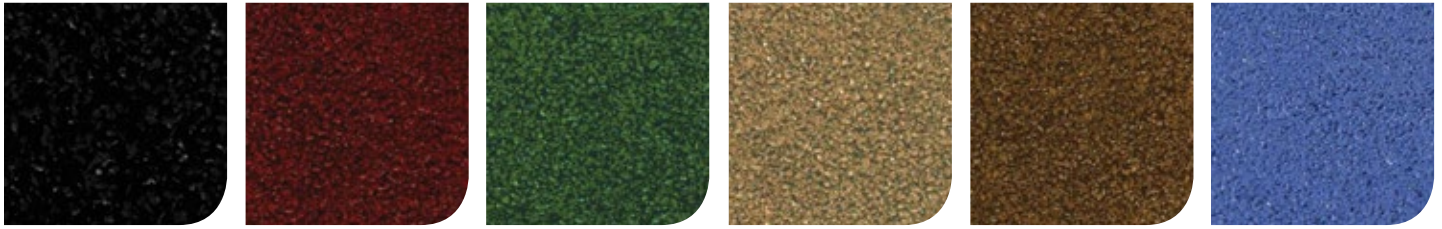

Black Terra Cotta Red* Forest Green* Stone Beige* Teak Brown* Blue Ember*


*Variation in color occurs in all pigmented products. Pigmented tiles are not recommended for high traffic areas because of potential pigment loss.

EPDM Speckled

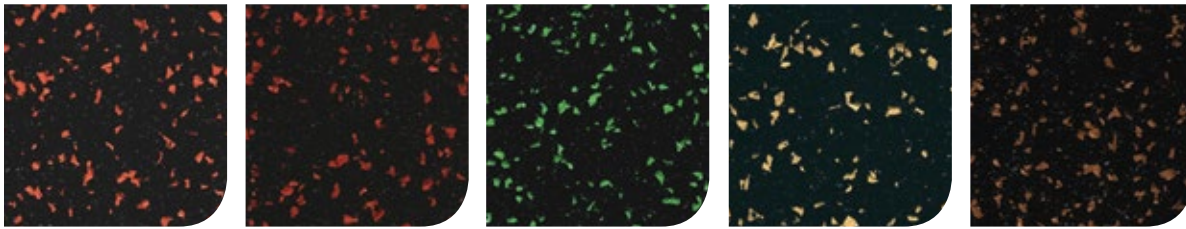


25% Orange 25% Red 25% Green 25% Beige 25% Brown

Note: Please select colors based on actual samples.

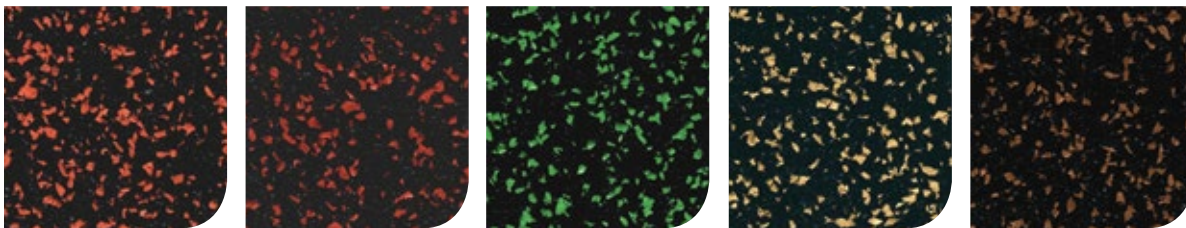


50% Orange 50% Red 50% Green 50% Beige 50% Brown

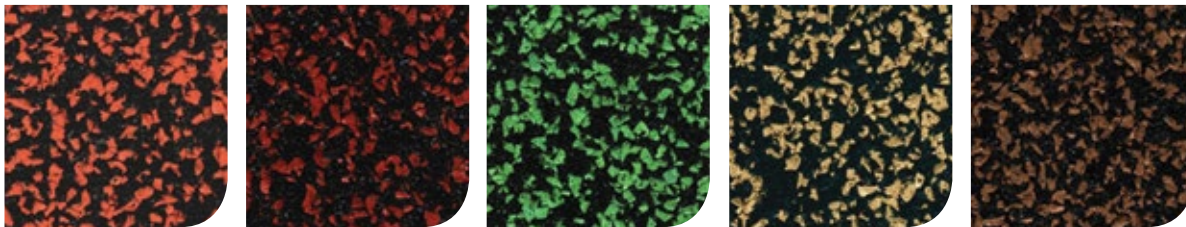

75% Orange 75% Red 75% Green 75% Beige 75% Brown

Customize your Color *The Color Innovator*

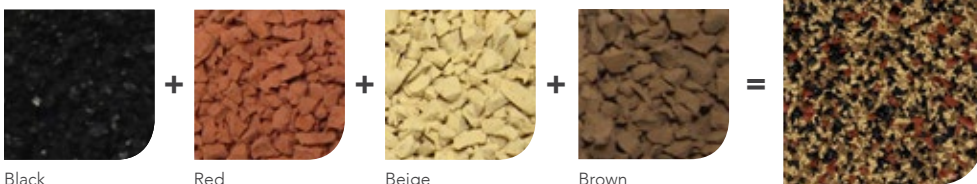

Black Red Beige Brown

Note: Variation in UV stability can occur. The printed colors are reproduced as closely as possible to the actual product. Please contact your sales representative for more information.

Color blends available in concentrations up to 80% color

Accessories:



DinoGrip Adhesive (4 gallon)



Finishing Kit



NuVista® TILES

by dinoflex



NuVista® Tiles provide superior noise reduction and high traction surfacing for rooftop patios, decks or walkways for apartment complexes, condominiums, office buildings, schools, restaurants and health care facilities. They can be installed over concrete, asphalt or a compacted granular base at grade, or over many types of roofing surfaces.

NuVista® Tiles also provide a non-vegetative border when used with green roof systems and can be used to create a high traction path to roof mounted mechanical systems. The recycled content combined with the regulation of water flow to roof drains, allow this product to contribute to LEED points.

Features:

- Water permeable
- Will not crack/break in cold or hot weather
- Slip resistant even when wet
- Noise reducing
- Impact absorbing

Benefits:


- Long life cycle
- Makes a fast and easy rejuvenation to old concrete patios
- Superior drainage for the regulation of water flow
- Reduces fall consequences
- Easy to maintain - sweep or hose off
- Beautifies previously unusable space
- Contributes to LEED credits






Size:

- 1" 24" x 24" = 4 ft²
(25 mm 61 cm x 61 cm = 0.37 m² 5.75 lbs/ft²)
- 1 3/4" 24" x 24" = 4 ft²
(44 mm 61 cm x 61 cm = 0.37 m² 5.75 lbs/ft²)
- 2 1/2" 24" x 24" = 4 ft²
(63 mm 61 cm x 61 cm = 0.37 m² 7.25 lbs/ft²)

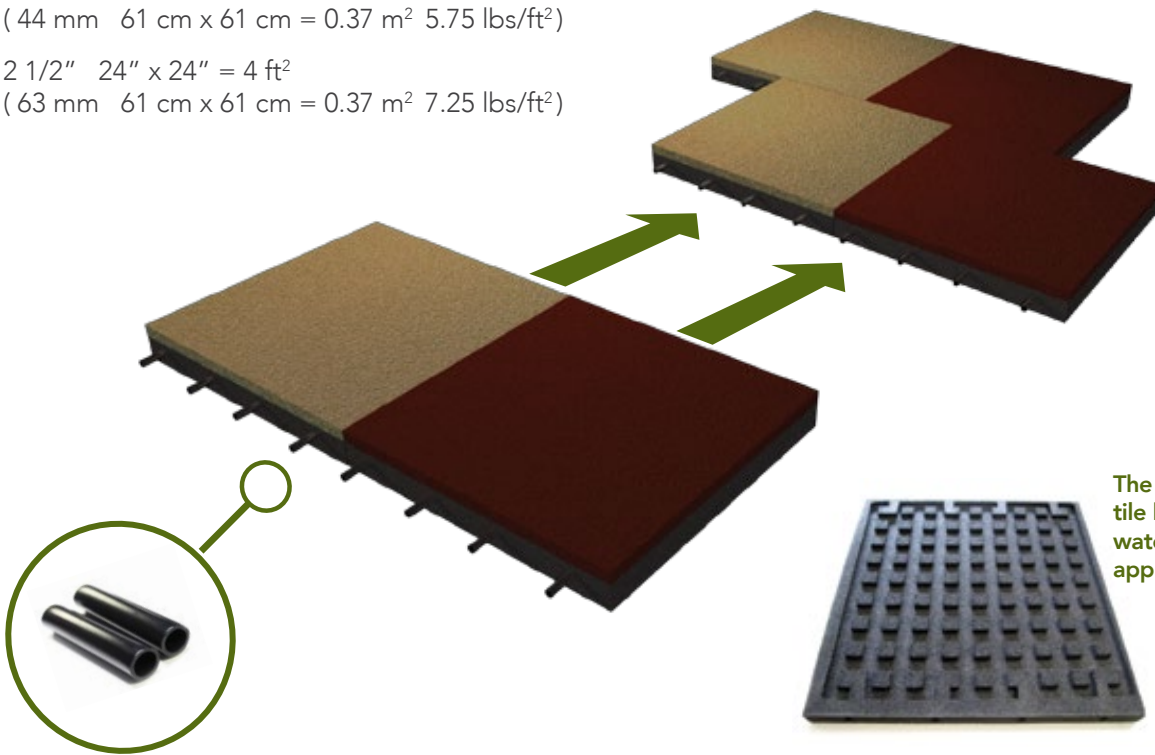

The raised design of the NuVista tile backing provides improved water flow, ideal for landscaping applications.

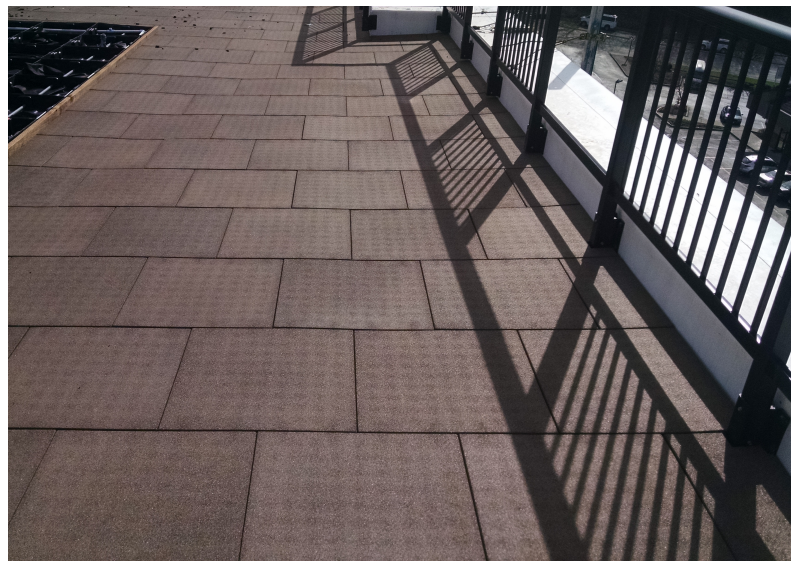

Let Us Introduce Ourselves

Dinoflex has been a leading innovator in the manufacturing of recycled rubber products for over 25 years. We specialize in producing premium quality rubber flooring, exterior tiles and custom products. Our merchandise provides solutions for architects, designers and builders that are cost effective and environmentally friendly.

LEED – Leadership in Energy and Environmental Design

Dinoflex recycled rubber products help qualify for LEED credits. Please refer to www.dinoflex.com for more information.

NuVISTA® Tiles Technical Data

| TEST | DESCRIPTION | NUVISTA® TILES |
|------------|--------------------------------|--|
| ASTM C1028 | Static Coefficient of Friction | Dry – 0.73; Wet – 0.81 (Pigment Color) |
| ASTM C1028 | Static Coefficient of Friction | Dry – 0.79; Wet – 0.81 (50% color) |
| ASTM D573 | Aging Weathering | No effects |

For complete specifications and technical data, please visit our website at www.dinoflex.com

5 YEAR WARRANTY



Dinoflex
P.O. Box 3309
5590 46 Ave S.E.
Salmon Arm, B.C., Canada
V1E 4S1

Toll Free: 1.877.713.1899
Direct: 250.832.7780
Email: sales@dinoflex.com

www.dinoflex.com



Represented By:



Publication Date:
September 2020